

APOLLO WELDING BLANKET

Description

Apollo is a Glas-Filament-Fabric with a grey, fire-retardant PU-coating on one side with aluminium pigments to increase the antislip properties and resistance to fraying.

Characteristics

Apollo is recommended for vertical use, for example as a welding and grinding curtain. Apollo is free of asbestos.

Application


The maximum application temperature is 550 °C, shortly up to 600°C.

Conditions for use

- CEPRO recommends the use of multiple layers for maximum protection.
- Always use welding blankets at an angle of at least 15 degrees.
- The temperatures shown are only an indication. The suitability of the selected product should always be tested beforehand.
- Regularly check welding blankets for tears and or other damage. Replace damaged blankets where necessary.
- Welding blankets can be used for many purposes and therefore, no guarantee can be given on their use. The end user is responsible for determining whether the welding blanket is suitable for use in a specific situation and whether it offers sufficient protection during the work to be performed.
- CEPRO welding blankets are sewn on the cut edges with best quality Kevlar thread.

Available dimensions

Apollo welding blanket, 200 x 100 cm	56.50.22
Apollo welding blanket, 200 x 200 cm	56.50.25
Apollo welding blanket, 200 x 300 cm	56.50.26
Part of a roll, width 100 cm	56.50.02.1000
Full roll 50 m ¹ , width 100 cm	56.50.02.1050
Made to size welding blanket	56.50.20

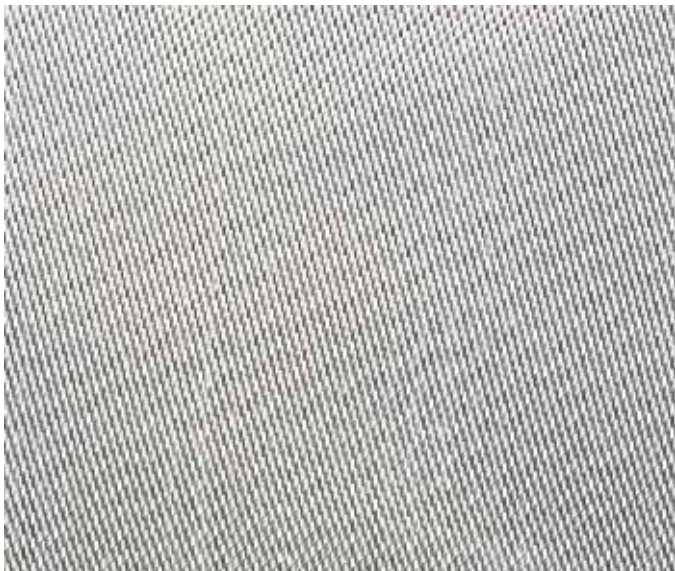

CEPRO_PFS_Welding blankets, Economy_Apollo_1EN_rev Version 001 - Check our website for the latest version.