

# INFOSHEET

## **CEPRO DIAMOND SHEET SEPARATIONS**

### Description

CEPRO diamond rigid sheets are developed to separate the workplace in general. It is a modular system which can be assembled and disassembled very easily.

#### Characteristics

Modular system, available with standard dimensions 940X2000mm and 440x2000mm and a thickness of 30mm. The thickness of steelplate used is 1.5mm. There are several foot elements and 2 types poles available to ensure a stabil construction.

To be used as a standalone booth, or linked for making complete booths. Cepro Diamond sheet wall elements can be used in combination with many other Cepro products.

This wall system contains welded steel parts, powder coated in grey RAL7035, gloss +/- 30%.

#### Application

Cepro Diamond sheet separations can be used to shield parts of the workplace from view. You can also create a physical barrier between a production area and the rest of the workplace. Cepro Diamond sheet separations do not have any sound absorbing properties.


#### Conditions for use

- CEPRO Diamond plate products are meant for use indoors
- The nuts and bolts used to connect the frame should be checked regularly





1EN

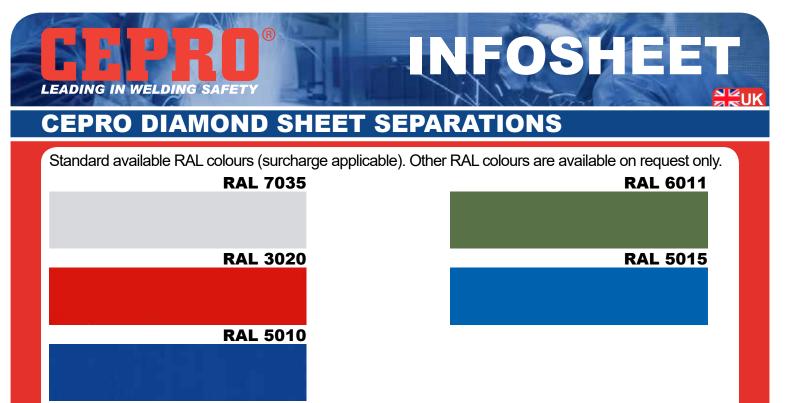

The RAL colors in this chart have been matched as closely as possible. This chart can not serve as a standard for RAL color products. The color depends on your monitor and printer. Use offical RAL color product for most accurate color.



Technical Specifications 1/13